




**Recovers up to 98% available silver, Reduces replenishment, and Protects the wash water !**



Recovers silver from B & W, E-6, and C-41 photo processing chemistries

**Silver Wizard™ J-SERIES**

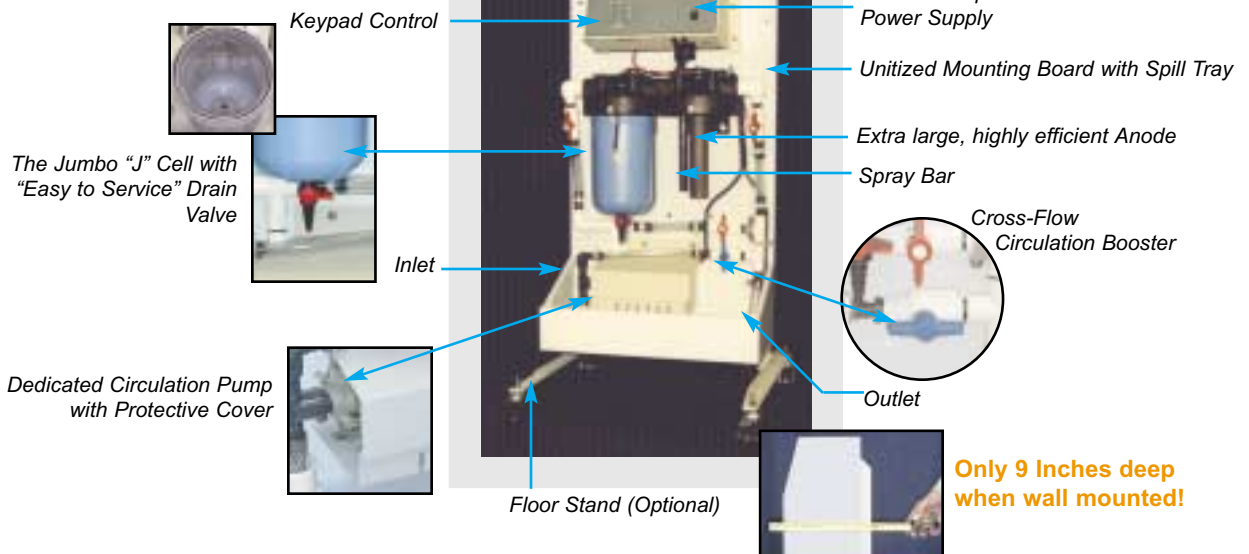

**J1t and J2t**



**Uniquely CSRS**

- t **Jumbo Cells And Anodes** afford greater plating efficiency due to the increased plating surface!
- t **The Cross Flow Circulation Booster** increases plating efficiency and reduces agitation in the processor fix tank!
- t **The Dedicated Circulation Pump** takes the load off your processor pump, and will not void the film processor warranty!

**J3t and J4t**



**Purchase When :**

- t You want the best system for the most effective silver recovery!
- t You want a product that's recommended by industry leaders
- t You have a wash water carry-over contamination problem.
- t You want to save up to 50% fixer replenishment costs.
- t You are hauling your chemicals, but would like to haul less!
- t Environmental compliance regulations are strict in your area.
- t You want control of the silver recovered from your fixer chemicals.
- t You want equipment that is trouble-free and easy to service.

**Guaranteed Not to compromise the integrity of your chemistry! Won't Sulfide Fixer!**

**Silver Wizard™ L-SERIES**



**Ideal for Low Volume**

When volume is low, and space is limited, The compact L1 is your solution! This economy system is microprocessor driven, and offers many of the features found in the sophisticated J-Series!

**Authorized Distributor**

**JD Photo-Tools**  
Tel: 0161 408 3099  
Web: [www.jdphoto.co.uk](http://www.jdphoto.co.uk)  
Mail: [jd\\_info@jdphoto.co.uk](mailto:jd_info@jdphoto.co.uk)

**Photo Data**  
Tel: 01462 452616  
Web: [www.photodata.com](http://www.photodata.com)  
Mail: [sales@photodata.com](mailto:sales@photodata.com)



## Features

	L-1	J-1t	J-2t	J-3t	J-4t
Microprocessor Self Test & Diagnostics	+	+	+	+	+
CSRS "Turbo Plate" Software	a	+	+	+	+
Automatic Low Silver Calibration Mode	+	+	+	+	+
Circuit Protection/Short Alarm	+	+	+	+	+
Ampere Hour Clock	+	+	+	+	+
Operating Hour Clock	+	+	+	+	+
Silver "RECOVERY NOW" Alert w/ "Snooze"	+	+	+	+	+
Automatic - 24 hour Operation	P	+	+	+	+
Service Drain Valve (s)	+	+	+	+	+
Designer Cover	+	+	+	+	+
Security Lock	-	a	a	a	a
Install Location - Wall Mount	+	+	+	+	+
Install Location - Floor Stand	a	a	a	a	a
Dedicated Circulation Pump	a	+	+	+	+
Secondary Containment - Spill Tray	a	+	+	+	+
Bypass System	+	+	+	+	+
Circulation Booster	a	+	+	+	+
Can be expanded by one additional plating cell	+	+	-	-	-
Safety Certifications - UL/TUV/CE	+	+	+	CE	CE
Immunity & Emissions Tested - FCC/CE	+	+	+	+	+
One (1) Year Warranty	+	+	+	+	+

## Specifications

	Units of Measure	L-1	J-1t	J-2t	J-3t	J-4t
Plating Surface	cm <sup>2</sup>	516	787	1574	2361	3149
Maximum Silver Plating Rate per Hour	g/hr	9	16	21	41	41
Film Processing Capacity - 80% exp (20% Clear)	m <sup>2</sup> /8hrs**	60	150	200	300	400
- 50% exp (50% Clear)	m <sup>2</sup> /8hrs**	24	60	76	120	160
- 20% exp (80% Clear)	m <sup>2</sup> /8hrs**	15	38	48	72	100
Average Sustained Ag Content	g/l	.3-.5	.2-.5	.2-.5	.2-5	.2-5
Fixer Savings +/- % volume	%	30*	30-50*	50*	50-70*	50-70*
Power Requirement - 115/230 VAC 50/60 Hz	-	+	+	+	+	+
Compatible Photographic Processes all B & W	-	+	+	+	+	+
C-41	-	+	+	+	+	+
E-6	-	+	+	+	+	+
Xray	-	+	+	+	+	+
Microfilm	-	+	+	+	+	+
Dimensions (W/H/D) approx	cm	41x68x18	53x91x23	53x91x23	71x91x23	89x91x23
Dimensions (W/H/D) approx	in	16x27x7	21x36x9	21x36x9	28x36x9	35x36x9
Shipping Weight	kg	15	31	35	45	57
Shipping Weight	lbs	33	63	78	98	126
Average Service Cycle	days	60-90	60-90	60-90	60-90	60-90

+ = Standard, - = N/A, a = Available, \* = Based on reduction from Manufacturer recommended replenishment rates, \*\* = Multiply m<sup>2</sup> by 10.76 to convert to ft<sup>2</sup> P = May require optional pump for 24 hr. operation

### JD Photo-Tools

Tel: 0161 408 3099  
 Web: [www.jdphoto.co.uk](http://www.jdphoto.co.uk)  
 Mail: [jd.info@jdphoto.co.uk](mailto:jd.info@jdphoto.co.uk)



### Photo Data

Tel: 01462 452616  
 Web: [www.photodata.com](http://www.photodata.com)  
 Mail: [sales@photodata.com](mailto:sales@photodata.com)

